



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

#310 S  
DHAUGER  
2-21-01

Jc872 U.S. PRO  
10/023161  
12/18/01

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

00204653.0

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN  
THE HAGUE, 04/10/01  
LA HAYE, LE





Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

**Blatt 2 der Bescheinigung**  
**Sheet 2 of the certificate**  
**Page 2 de l'attestation**

Anmeldung Nr.:  
Application no.: 00204653.0  
Demande n°:

Anmeldetag:  
Date of filing: 20/12/00  
Date de dépôt:

Anmelder:  
Applicant(s):  
Demandeur(s):  
Koninklijke Philips Electronics N.V.  
5621 BA Eindhoven  
NETHERLANDS

Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention:

Device, especially an electroluminescent display device, and method for making the same

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:  
State:  
Pays:

Tag:  
Date:  
Date:


Aktenzeichen:  
File no.  
Numéro de dépôt:

Internationale Patentklassifikation:  
International Patent classification:  
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:  
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR  
Etats contractants désignés lors du dépôt:

Bemerkungen:  
Remarks:  
Remarques:



Device, especially an electroluminescent display device, and method for making the same

EPO - DG 1

20. 12. 2000

(86)

The invention pertains to a device, especially an electroluminescent (EL) display device, comprising two or more parts which define a cavity for accommodating one or more components, such as an EL element, and which are sealed together by means of a thermosetting adhesive present at the interface of the two or more parts. The invention further  
5 pertains to a method of making the said device, at least comprising the steps of applying a thermosetting adhesive to the interface of at least one of the parts, bringing the parts together thus forming a cavity (for) accommodating one or more components, and heating the device so as to cure the thermosetting adhesive.

An EL display device emits light when the device is suitably connected to a  
10 power supply. If the light emission originates in an organic material, said device is referred to as an organic EL device. An (organic) EL device can be used, inter alia, as a thin light source having a large luminous surface area, such as a backlight for a liquid crystal display (LCD) or a watch. An (organic) EL device can also be used as a display if the EL device comprises a (large) number of EL elements, which may or may not be independently addressable.

15 A device of the type mentioned in the opening paragraph is disclosed in European patent application EP 0 350 907 A2. This publication describes (in conjunction with Fig. 2) a conventional thin film EL panel which is prepared by forming on a glass base plate (2) a lower transparent electrode (3), a lower insulating layer (4), a luminescent layer (5), an upper insulating layer (6) and an upper electrode (7) in this order. The constitution of  
20 the layers (3 to 7) is called an EL element (1). In order to prevent moisture from reaching the EL element, it is covered by a glass cover (8) which is adhered to the glass base plate (2) by a thermosetting adhesive, such as an epoxy. By heating the entire assembly to a temperature typically in the range of e.g. from 80 to 130°C during 45 to 5 minutes respectively, the epoxy is cured and the cover is sealed onto the glass plate.

25 During this process the viscosity of the adhesive initially decreases to a level that allows it to flow over the substrate. At the same time, the pressure of the gas trapped in the cavity defined by the cover and the substrate increases. As a result of this concurrence, the adhesive seal may be damaged or even broken.

It is an object of the present invention to avoid this kind of damage or at least reduce the chance that such damage occurs.

To this end, the device according to the present invention is characterized in that at least one channel is provided in the said interface. Such a channel allows controlled displacement of the adhesive while curing the adhesive thus relieving the pressure on the rest of the seal.

It is preferred that a reservoir for the adhesive is present at one or both ends of the channel(s), preferably at least a capillary reservoir at the end of the channel that is farthest removed from the cavity, i.e. outside the cavity. Thus, adhesive can be supplied from the channel and from within the cavity and the displaced adhesive is captured by the outside reservoir without risking interference of the adhesive with other components of the device.

The invention further pertains to a method of making a device as described above characterized in that, after bringing the parts together, at least one channel is present in the interface of those parts and in that the amount of adhesive in channel and/or in the cavity near the channel is such that the increase in pressure resulting from the said heating is at least partially relieved by displacement of the adhesive in the channel(s).

The invention will now be further explained with reference to the drawings in which two embodiments of the device according to the present invention are schematically shown.

Figure 1 shows a cross-section of a device in which the present invention can be applied.

Figure 2 shows a cover in accordance with the state of the art which is commonly used in devices of the kind shown in Figure 1.

Figures 3, 4 and 5 show three embodiments of a cover in accordance with the present invention.

Figure 6 shows the typical changes in the viscosity of a thermosetting adhesive while curing.

Figure 1 shows an electroluminescent (EL) display device 1, comprising a glass substrate 2 on which several layers have been deposited by means of processes which are generally known in the art, such as physical or chemical vapor deposition. The device 1 comprises an active or emissive layer 3 comprising an organic electro-luminescent material, such as a coumarin, or a conjugated polymer like PPV (poly(P-phenylene vinylene)) or a PPV-derivative, sandwiched between two patterns of electrode layers of an electrically conductive material. In this example, the electrode layers comprise column or data electrodes

4, which are deposited directly onto the glass substrate 2, and row or selection electrodes 5, thus forming a matrix of light emitting diodes (LEDs). At least electrode layer 4 is made of a material, such as indium tin oxide (ITO), that is transparent to the light emitted by the active layer 3. During operation, the column electrodes 4 are driven such that they are at a sufficiently high positive voltage relative to the row electrodes 5, to inject holes in the active layer 3.

After depositing the electrodes 4, 5 and the active layer 3, a pattern of an thermosetting adhesive 6, such as a two-component epoxy resin, is plotted onto the glass substrate 2 and across electrically conductive traces 4' and 5'. The shape of the pattern of the plotted adhesive is substantial equal to the shape of the interface, such as a lower rim, of a cover, in this case a pre-formed lid 7 of a metal sheet material, with which the assembly is to be hermetically sealed. The traces 4' and 5' provide an electrical connection to pads outside the perimeter of the lid 7.

After placing the lid 7, which in this particular example is rectangular in shape, in general register with and on top of the plotted adhesive 6, the adhesive 6 is cured by elevating the temperature of the entire assembly. Typically the temperature is raised from room temperature, i.e. approximately 25°C, to a temperature of 80°C. As a result of this increase in temperature, the pressure of the gas trapped in the cavity 8 defined by the substrate 2 and the cover 7 also increases thus exerting considerable forces on the seal. At the outset of the curing process, the adhesive in the seal still has a low viscosity. Accordingly, the seal is still rather vulnerable and may be damaged by the said forces.

This problem could be suppressed by providing a hole 9 in the lid 7' as shown in Fig. 2, which serves to equalize the pressure inside and outside the cavity 8. However, such a hole 9 has to be sealed in a separate and additional process step and the resulting seal remains a potential weak spot in the end product.

Figs. 3, 4 and 5 show three embodiments of a lid 7'' in accordance with the present invention. The interface or rim 11 of the lid 7'' in Fig. 3 is provided with a channel 10 in one of its four corners. The channel 10 may be provided in the plane of the rim 11 as depicted in Fig. 3 and 4, or may be provided through to the lid 7'' having an opening in the plane of the rim 11. Once the adhesive 6 has been plotted onto the substrate 2 and/or onto the rim 11 en into the channel 10 of the lid 7'', the lid 7'' is placed over the EL element thus defining the cavity and forming an uncured seal. The seal is subsequently cured by heating the assembly to a temperature at which the components in the adhesive begin the react (cross-link).

Figure 6 shows an example of typical changes in the viscosity of a thermosetting adhesive when the temperature is raised from room temperature, i.e. approximately 25°C at time  $t = 10$  minutes to a temperature of 80°C. As in most liquid materials, the viscosity initially drops as a result of the increased temperature (e.g.,  $t = 10$  min to  $t \approx 12$  min). Once the cross-linking of the components starts, the viscosity of the adhesive gradually increases until the curing is completed (e.g.,  $t \approx 12$  min to  $t \approx 15$  min).

The present invention utilizes this behavior of the adhesive: when the adhesive is still in a liquid phase, it can be easily displaced in the channel 10 which connects the cavity to the outside environment. Thus the gas inside the cavity 8 is allowed to expand and an effective pressure relieve for the rest of the seal is provided. By the time the adhesive begins to cure, the temperature and hence the pressure of the said gas will substantially not increase any further, or at least not to such an extent that the integrity of the seal is at risk, and pressure relieve is no longer required. When the obtained device cools down the pressure in the cavity will drop e.g. to a level substantially equal to atmospheric pressure or, depending on the dimensions of the cavity and the channel(s), a sub-atmospheric pressure. In the latter case, the strength of the seal is enhanced even further.

It is preferred that an additional amount of adhesive is applied at or near the end of the channel(s) nearest the cavity. In that case, the corner of the lid 7'' where the channel 10 is located effectively serves as a supply reservoir.

A (receiving) reservoir for the adhesive is preferably present at the other end of the channel. Fig. 4 shows a reservoir essentially consisting in two elongated recesses 12 adjacent the end of the channel 10 that is farthest removed from the cavity 8. During expansion of the gas inside the cavity 8, the adhesive present in the cavity 8 and the channel 10 is pushed outwards and captured by the capillary recesses formed by the elongated recesses 12 and the top surface of the glass substrate 2.

Pressure relieve is further enhanced if the device comprises two or more channels, for instance one in each of the corners of the lid 7''. It is preferred that the volume of the channel(s) or, if one or more reservoirs are present, the combined volume of the channel(s) and the reservoir(s), is substantially equal to or larger than the difference of the volume of the gas contained in the cavity at the operating temperature of the device and the volume of the said gas at the curing temperature of the adhesive.

A getter may be present in the cavity, e.g. attached to the internal surface of the lid. The lid may be shaped in such a way as to reduce the volume of the cavity and hence the ability of the gas in the cavity to expand.



As a matter of course, the channel(s) can be provided in the substrate, e.g. by means of etching, instead of or in addition to the channel(s) in the lid or other parts defining the cavity. Further, it is not necessary that the channel (or channels) bridges the entire interface. Instead, the channel may, for instance, extend upwardly through the edge and the upper surface of the lid, provided that such a channel remains in fluid communication with the adhesive in the seal whilst curing. Also, the lid may have other shapes, e.g. octagonal or oval, and may be made of a transparent material, e.g. when the lid covers (one of) the display side(s) of the EL element.

The invention is not restricted to the embodiments described above and can be varied in a number of ways within the scope of the claims. For instance, although the above description is primarily directed towards EL devices, the invention can be applied in other devices where the increase in pressure of internal or trapped gasses during the thermosetting of an adhesive in a seal may cause damage to that seal.

In summary, the invention pertains to a device, especially an electroluminescent display device, comprising two or more parts which define a cavity for accommodating one or more components, such as an electroluminescent element, and which are sealed together by means of a thermosetting adhesive present at the interface of the two or more parts. At least one channel is provided in the said interface.



## CLAIMS:

20.12.2000

(86)

1. Device, especially an electroluminescent display device (1), comprising two or more parts (2, 7) which define a cavity (8) for accommodating one or more components, such as an electroluminescent element (3, 4, 5), and which are sealed together by means of a thermosetting adhesive (6) present at the interface (11) of the two or more parts (2, 7),  
5 **characterized in that** at least one channel (10) is provided in the said interface (11).
2. Device according to claim 1, wherein a reservoir for the adhesive (6) is present at one or both ends of the channel(s) (10).
- 10 3. Device according to claim 2, wherein a capillary reservoir (12) is located at the end of the channel(s) (10) that is (are) farthest removed from the said cavity (8), i.e. outside the cavity (8).
4. Device according to any one of the preceding claims, wherein one of the parts  
15 (2, 7'') has a substantially polygonal, e.g. rectangular, interface (11) with the channel(s) (10) being located in one (or more) of the corners of the polygonal interface (11).
5. Device according to any one of the preceding claims, which comprises a substantially flat substrate (2) on which an electroluminescent element (3, 4, 5) has been  
20 deposited and a pre-formed cover (7'') of a sheet material, which has been shaped to define part of the cavity (8), the channel(s) (10) and, optionally, the reservoir(s).
6. Method of making a device, especially an electroluminescent display device (1), comprising two or more parts (2, 7), at least comprising the steps of applying a  
25 thermosetting adhesive (6) to the interface (11) of at least one of the parts (2, 7), bringing the parts (2, 7) together thus forming a cavity (8) (for) accommodating one or more components, such as an electroluminescent element (3, 4, 5), heating the device so as to cure the thermosetting adhesive (6), **characterized in that**, after bringing the parts (2, 7'') together, at least one channel (10) is present in the interface (11) of those parts (2, 7) and in

that the amount of adhesive (6) in the channel (10) and/or in the cavity (8) near the channel (10) is such that the increase in pressure resulting from the said heating is at least partially relieved by displacement of the adhesive (6) in the channel(s) (10).

- 5 7. Method according to claim 6, wherein the adhesive (6) flowing out of the channel (10) is captured by at least one reservoir (12) outside the said cavity (8).

## ABSTRACT:

EPO - DG 1  
20. 12. 2000

(86)

The invention pertains to a device, especially an electroluminescent display device, comprising two or more parts which define a cavity for accommodating one or more components, such as an electroluminescent element, and which are sealed together by means of a thermosetting adhesive present at the interface of the two or more parts. At least one

5 channel is provided in the said interface.

Fig. 3



PHNL000733

1/3

EPO - DG 1  
20. 12. 2000

(86)

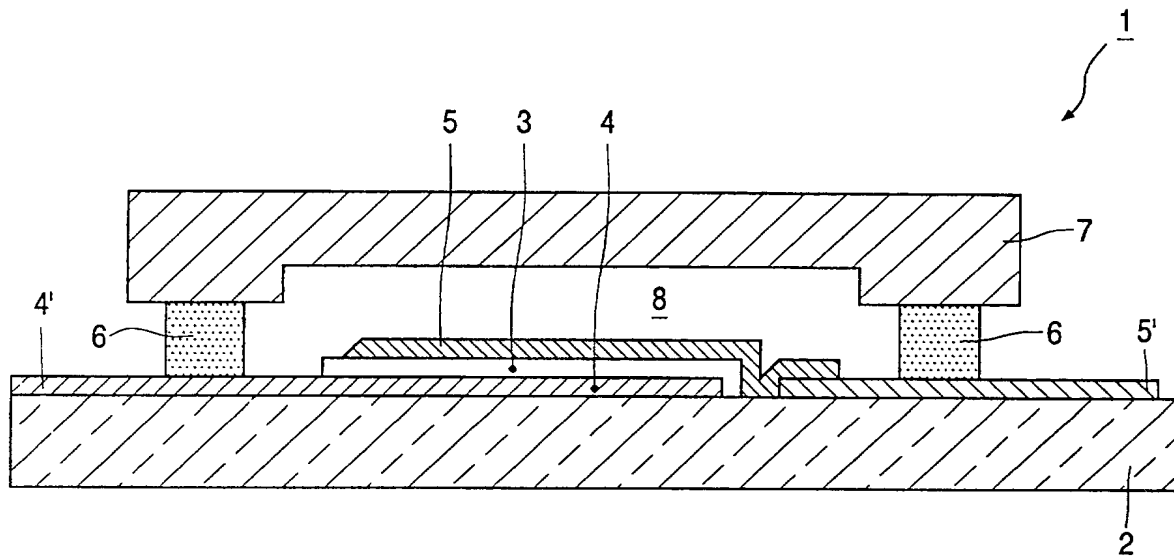


FIG. 1

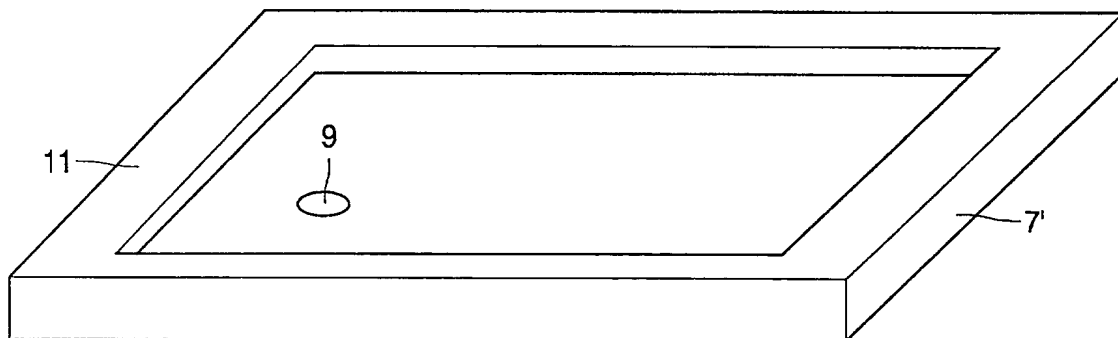


FIG. 2

2/3

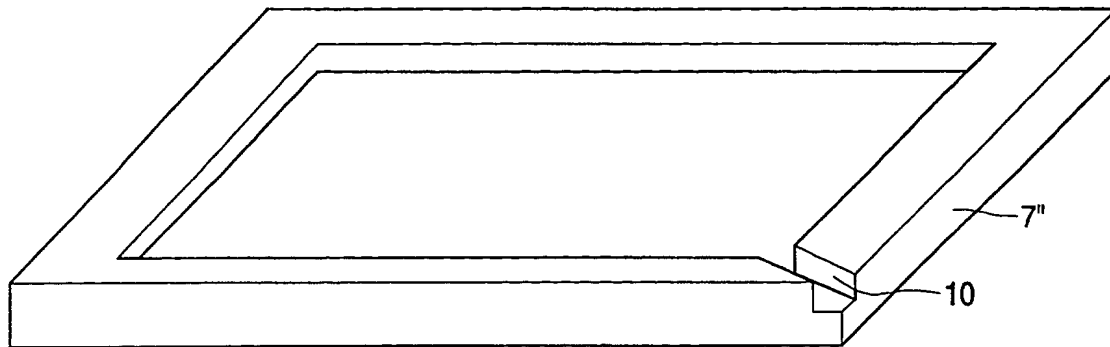


FIG. 3

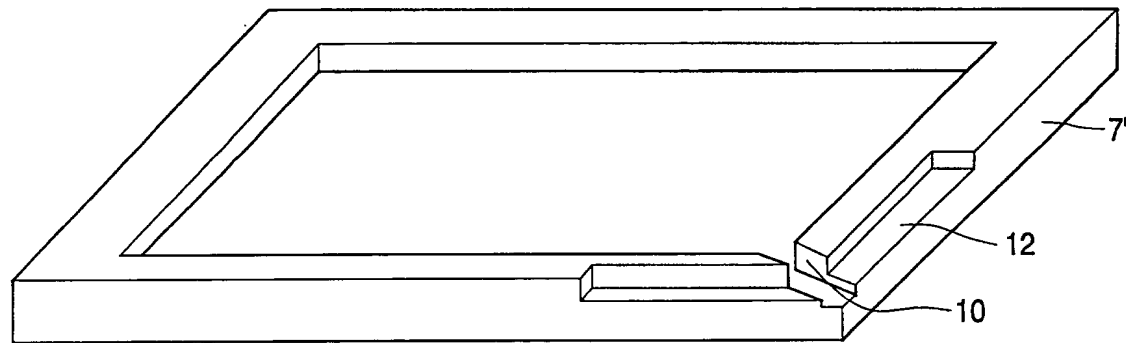


FIG. 4

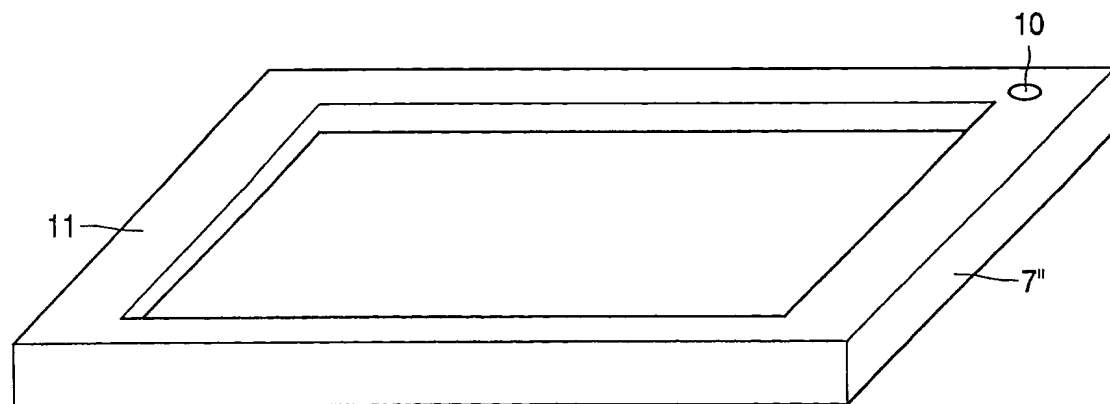


FIG. 5



PHNL000733

3/3

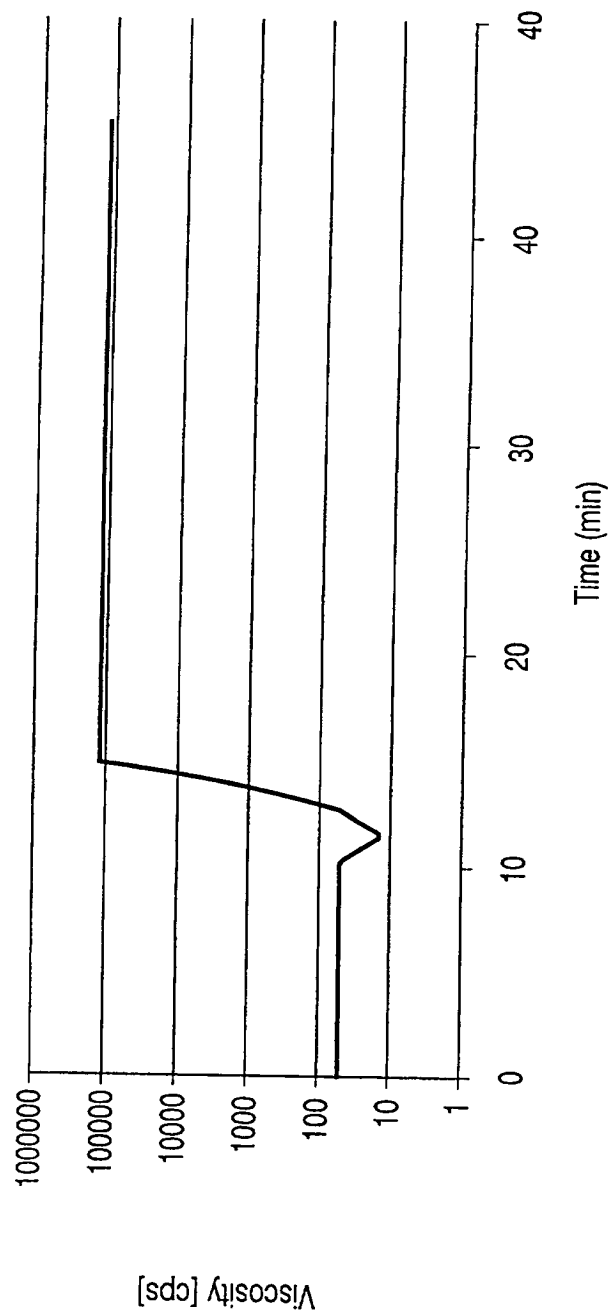


FIG. 6

